

Clock Oscillator (时钟振荡器) - KS506T

Feature 特征

- Programmable clock oscillators (CMOS, PECL, LVDS, CML, HCSL output logic) with short lead time 可编程输出振荡器
- High frequency up to 245MHz; low phase jitter 超高频低抖动



RoHS
Compliant
KOAN

Applications 应用

- Mobile communications, radar navigation, digital products, HD monitoring, precision instruments 移动通信, 雷达导航, 数码产品, 高清监控, 精密仪器等


General Specifications 规格参考

PARAMETER	性能参数	KS506T
Frequency Range	频率范围	10.0MHz ~ 245.0MHz
Supply Voltage	供给电压	+2.5V/3.3V (±10%)
Output Logic	输出波形	CMOS
Output Load	输出负载	15pF
Frequency Tolerance	调整频差	±5ppm ~ ±30ppm
Current Consumption	工作电流	8~40mA
Output Logic High "1"	输出电平 高	0.9V _{dd} min
Output Logic Low "0"	输出电平 低	0.1V _{dd} max
RMS Jitter	抖动	0.8ps typ. (12KHz~20MHz)
Rise & Fall Time	上升下降时间	10ns max
Start-up Time	起振时间	10ms max
Duty Cycle	占空比	45~55%
Aging Per Year	老化率	±3ppm~±5ppm/year
Storage Temperature Range	储存温度范围	-55°C ~ +125°C

Frequency Stability 温度频差 VS Operating Temperature Range 温度范围						
Temp. Code	Temp. \ppm	±10	±20	±30	±50	±100
B	-20~70°C	○	○	○	○	○
C	-40~85°C		○	○	○	○
D	-20~105°C			○	○	○
E	-40~105°C				○	○
F	-55~105°C					○
G	-20~125°C					○

NOTE: Please consult for other specifications 若有其它规格需求请告知

Outline Dimensions (Unit: mm) 外形尺寸

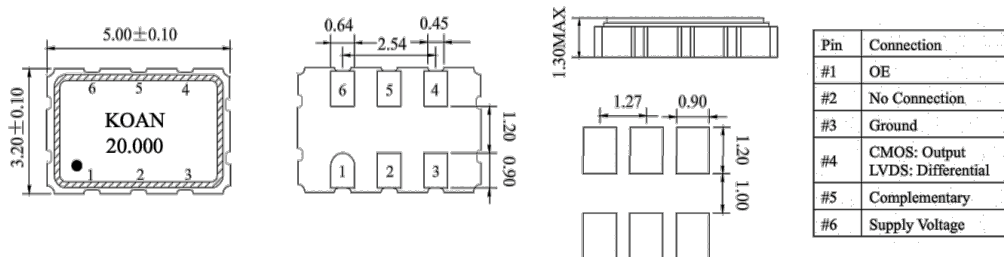


Part Number Guide 产品编号

KS506T - **20.000** - **33** - **C** - **30** - **NS**

型号	标称频率	工作电压	工作温度	温度频差	特殊要求
'KS':产品系列 '506':封装尺寸 SMD 5.0x3.2mm 6 pad 'T':输出波形 CMOS	(In MHz)	25=2.5V 33=3.3V	B: -20~+70°C C: -40~+85°C D: -20~+105°C E: -40~+105°C F: -55~+105°C G: -20~+125°C	10 = ±10ppm 20 = ±20ppm 30 = ±30ppm 50 = ±50ppm 100 = ±100ppm	'NS':特殊要求

Reflow Profile 回流焊

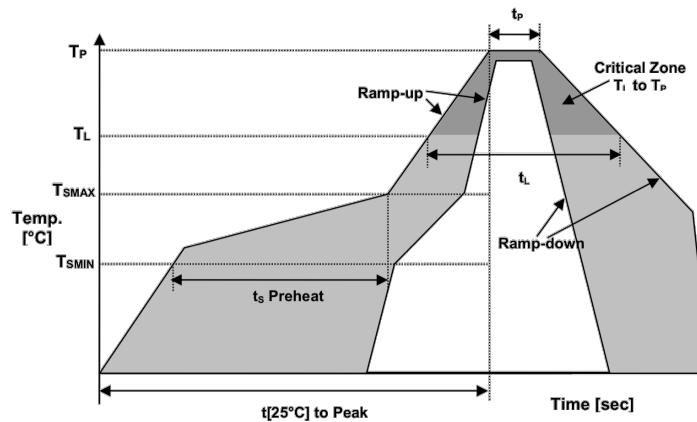

Temperature Min Preheat	最低预热温度	T_{smin}	150°C
Temperature Max preheat	最高预热温度	T_{smax}	200°C
Time (T_{smin} to T_{smax})	时间差	T_s	60~120 sec
Temperature	温度	T_L	217°C
Peak Temperature	最高温	T_p	260 °C
Ramp-up Rate	升温速度	R_{up}	3°C/sec max
Ramp-down Rate	降温速度	R_{down}	6°C/sec max
Time within 5°C of Peak Temperature	最高温度停留时间	t_p	30 sec
Time $t[25°C]$ to peak temperature	25度到最高温度时间	$t[25°C]$ to peak	480 sec
Time	时间	t_L	60~150 sec