

Clock Oscillator (时钟振荡器) - KS25

Feature 特征 Low power consumption 低功耗消耗

Applications 应用

- Computer control, railway measurement and control, intelligent systems, instrument, frequency sources 电脑控制, 铁路测控, 智能系统, 仪器仪表, 频率源等



RoHS
Compliant
KOAN

General Specifications 规格参考


PARAMETER	性能参数	KS25		
Frequency Range	频率范围	0.25~50.0MHz	0.312~160.0MHz	1.75~50.0MHz
Supply Voltage	供给电压	+1.2/1.5V (±10%)	+1.8/2.5/3.3V(±10%)	+5.0V(±10%)
Output Logic	输出波形	CMOS		
Operating Temperature Range	输出负载	15pF		
Frequency Tolerance	调整频差	±5ppm ~ ±30ppm		
Current Consumption	工作电流	3~35mA		
Output Logic High "1"	输出电平 高	0.9V min	0.9V _{dd} min	
Output Logic Low "0"	输出电平 低	0.1V max @1.2V	0.1V _{dd} max @1.5/1.8/3.3/5.0V	
Jitter	抖动	0.05~0.3pS		
Rise & Fall Time	上升下降时间	10ns max		
Start-up Time	起振时间	10ms max		
Duty Cycle	占空比	45~55%		
Aging Per Year	年化率	±3ppm~±5ppm/year		
Storage Temperature Range	储存温度范围	-55°C ~ +125°C		

Frequency Stability 温度频差 VS Operating Temperature Range 温度范围

Temp. Code	Temp.\ppm	±10	±20	±30	±50	±100
B	-20~70°C	○	○	○	○	○
C	-40~85°C		○	○	○	○
D	-20~105°C			○	○	○
E	-40~105°C				○	○
F	-55~105°C					○
G	-20~125°C					○

NOTE: Please consult for other specifications 若有其它规格需求请告知


Outline Dimensions (Unit: mm) 外形尺寸

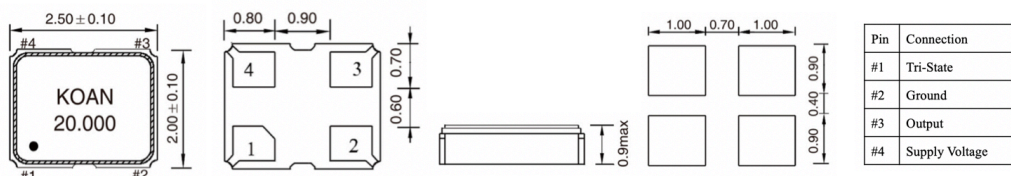

Part Number Guide 产品编号

型号	标称频率	工作电压	工作温度	温度频差	特殊要求
'KS':产品系列 '25':封装尺寸 SMD 2.5x2.0mm	(In MHz)	12=1.2V 15=1.5V 18=1.8V 25=2.5V 33=3.3V 50=5.0V	B: -20~+70°C C: -40~+85°C D: -20~+105°C E: -40~+105°C F: -55~+105°C G: -20~+125°C	10 = ±10ppm 20 = ±20ppm 30 = ±30ppm 50 = ±50ppm 100 = ±100ppm	'NS':特殊要求

Reflow Profile 回流焊

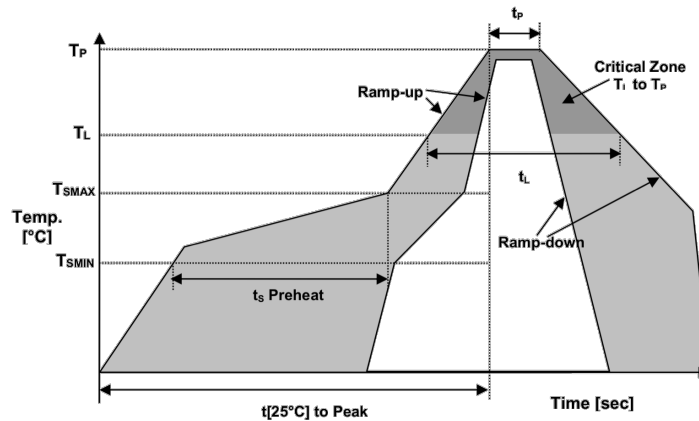

Temperature Min Preheat	最低预热温度	T_{smin}	150°C
Temperature Max preheat	最高预热温度	T_{smax}	200°C
Time (T_{smin} to T_{smax})	时间差	T_s	60~120 sec
Temperature	温度	T_L	217°C
Peak Temperature	最高温	T_p	260 °C
Ramp-up Rate	升温速度	R_{up}	3°C/sec max
Ramp-down Rate	降温速度	R_{down}	6°C/sec max
Time within 5°C of Peak Temperature	最高温度停留时间	t_p	30 sec
Time $t[25^\circ\text{C}]$ to peak temperature	25度到最高温度时间	$t[25^\circ\text{C}]$ to peak	480 sec
Time	时间	t_L	60~150 sec