

Clock Oscillator (时钟振荡器) - KS14

Applications 应用

Computer control, railway measurement and control, intelligent systems, instrument, frequency sources 电脑控制, 铁路测控, 智能系统, 仪器仪表, 频率源等



RoHS
Compliant
KOAN


General Specifications 规格参考

PARAMETER	性能参数	数值	
Frequency Range	频率范围	25KHz~200MHz	200KHz~125MHz
Supply Voltage	供给电压	+3.3V (±10%)	+5.0V(±10%)
Output Logic	输出波形	CMOS	
Frequency Tolerance	调整频差	±5ppm ~ ±30ppm	
Frequency Stability	温度频差	见下表	
Operating Temperature Range	温度范围	见下表	
Current Consumption	工作电流	9~54mA max (frequency dependent)	
Output Load	输出负载	15pF	
Start-up Time	起振时间	10ms max	
Duty Cycle	占空比	45~55%	
Rise & Fall Time	上升下降时间	5ns max	
Output Logic High "1"	输出电平 高	0.9Vdd min	
Output Logic Low "0"	输出电平 低	0.1Vdd max	
Storage Temperature Range	储存温度范围	-55°C ~ +125°C	
Aging Per Year	老化率	±3ppm ~ ±5ppm/year	

Frequency Stability 温度频差 VS Operating Temperature Range 温度范围						
Temp. Code	Temp.\ppm	±10	±20	±30	±50	±100
B	-20~70°C	○	○	○	○	○
C	-40~85°C		○	○	○	○
D	-55~85°C			○	○	○
E	-55~105°C				○	○
F	-55~125°C				○	○

NOTE: Please consult for other specifications 若有其它规格需求请告知


Outline Dimensions (Unit: mm) 外形尺寸

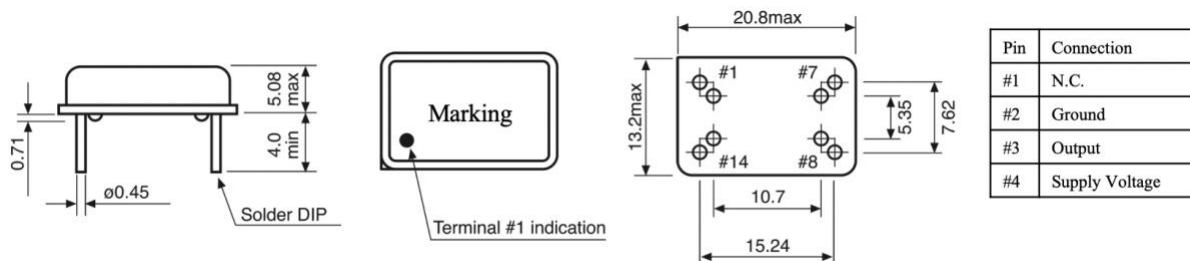

Part Number Guide 产品编号

KS14	-	7.3728	-	33	-	C	-	30	-	
封装	-	标称频率	-	工作电压	-	工作温度	-	温度频差	-	特殊要求
'KS':产品系列				33=3.3V 50=5.0V		B: -20~+70°C C: -40~+85°C D: -55~+85°C E: -55~+105°C F: -55~+125°C		10 = ±10ppm 20 = ±20ppm 30 = ±30ppm 50 = ±50ppm 100 = ±100ppm		NS=特殊要求

Wave Solder Profile 波峰焊

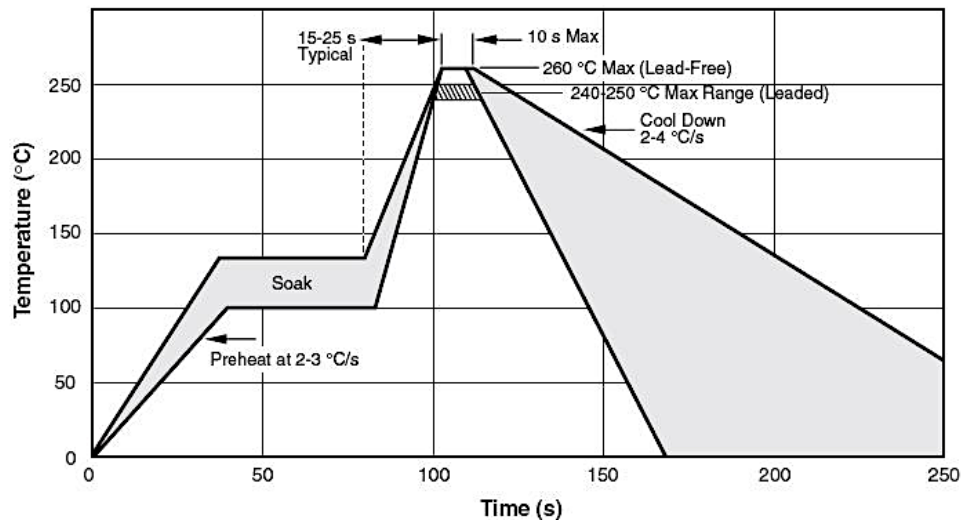

Average Ramp-up Rate	升温速度	~200°C/Second
Heating Rate during preheat	预热速度	1~2°C/second typical; 4°C/second max
Final Preheat Temperature Ts	最终预热温度	~130°C
Peak Temperature Tp	最高温度	260°C
Time within +0°C/-5°C of actual temperature tp	实际温度时间	10 seconds
Ramp-Down Rate	降温速度	5°C/second max

Revision 版本

版本 Rev.	修改页 Revise Page	修改内容 Revise Contents	日期 Date	修改人 Reviser
0	N/A	Initial issue	2020.09.27	JH