


Voltage Controlled Clock Oscillator (压控振荡器) - KV32T/KV50T/KV70T

Feature 特征

Frequency pulling range from $\pm 100 \sim \pm 200$ ppm with wide frequency range; 0.6pS phase jitter. 压控范围 $\pm 100 \sim \pm 200$ ppm 超高频, 低相噪抖动



Applications 应用

Frequency electrical calibration, high-frequency network application system, military anti-interference communication 频率电校准, 高频网络应用系统, 军事防干扰通讯

General Specifications 规格参考

PARAMETER	性能参数	KV32T KV50T KV70T	
Frequency Range	频率范围	10.0~245.0MHz	
Supply Voltage	供给电压	+2.5V ($\pm 10\%$)	+3.3V ($\pm 10\%$)
Center Control Voltage	中心控制电压	1.25Vdc (0.25V~2.25V)	1.65Vdc (0.3V~3.0V)
Output Logic	输出波形	CMOS	
Output Load	输出负载	15pF	
Frequency Tolerance	调整频差	± 20 ppm	
Current Consumption	工作电流	40mA max	
Output Logic High "1" Output Logic Low "0"	输出电平 高 输出电平 低	0.9V _{dd} min 0.1V _{dd} max	
Frequency Pulling Range	压控范围	$\pm 80 \sim \pm 200$ ppm	
Integrated Phase Jitter	抖动	0.6ps max (12KHz~20MHz)	
Input Impedance	输入电阻	1M Ω typical	
Rise & Fall Time	上升下降时间	10ns max	
Start-up Time	起振时间	5ms typical, 10ms max	
Output Enable/Disable Time	启动/禁用时间	Enable: 200ns max Disable: 50ns max	
Linearity	非线性误差	$\pm 5\%$ typical, $\pm 10\%$ max	
Duty Cycle	占空比	45~55%	
Modulation Bandwidth (-3dB)	调制宽带	10KHz min.	
Aging Per Year	年老化率	± 3 ppm~ ± 5 ppm/year	
Storage Temperature Range	储存温度范围	-55°C ~ +125°C	

Frequency Stability 温度频差 VS Operating Temperature Range 温度范围						
Temp. Code	Temp. \ppm	± 10	± 20	± 30	± 50	± 100
B	-20~70°C	○	○	○	○	○
C	-40~85°C		○	○	○	○
D	-55~85°C			○	○	○
E	-55~105°C				○	○
F	-55~125°C				○	○

NOTE: Please consult for other specifications 若有其它规格需求请告知

■ Outline Dimensions (Unit: mm) 外形尺寸


KV32T		<table border="1"> <thead> <tr> <th>Pin</th> <th>Connection</th> </tr> </thead> <tbody> <tr><td>#1</td><td>Vcontrol</td></tr> <tr><td>#2</td><td>Tri-State</td></tr> <tr><td>#3</td><td>GND</td></tr> <tr><td>#4</td><td>Output</td></tr> <tr><td>#5</td><td>N.C.</td></tr> <tr><td>#6</td><td>VDD</td></tr> </tbody> </table>	Pin	Connection	#1	Vcontrol	#2	Tri-State	#3	GND	#4	Output	#5	N.C.	#6	VDD
Pin	Connection															
#1	Vcontrol															
#2	Tri-State															
#3	GND															
#4	Output															
#5	N.C.															
#6	VDD															
KV50T		<table border="1"> <thead> <tr> <th>Pin</th> <th>Connection</th> </tr> </thead> <tbody> <tr><td>#1</td><td>Vcontrol</td></tr> <tr><td>#2</td><td>Tri-State</td></tr> <tr><td>#3</td><td>GND</td></tr> <tr><td>#4</td><td>Output</td></tr> <tr><td>#5</td><td>N.C.</td></tr> <tr><td>#6</td><td>VDD</td></tr> </tbody> </table>	Pin	Connection	#1	Vcontrol	#2	Tri-State	#3	GND	#4	Output	#5	N.C.	#6	VDD
Pin	Connection															
#1	Vcontrol															
#2	Tri-State															
#3	GND															
#4	Output															
#5	N.C.															
#6	VDD															
KV70T		<table border="1"> <thead> <tr> <th>Pin</th> <th>Connection</th> </tr> </thead> <tbody> <tr><td>#1</td><td>Vcontrol</td></tr> <tr><td>#2</td><td>Tri-State</td></tr> <tr><td>#3</td><td>GND</td></tr> <tr><td>#4</td><td>Output</td></tr> <tr><td>#5</td><td>N.C.</td></tr> <tr><td>#6</td><td>VDD</td></tr> </tbody> </table>	Pin	Connection	#1	Vcontrol	#2	Tri-State	#3	GND	#4	Output	#5	N.C.	#6	VDD
Pin	Connection															
#1	Vcontrol															
#2	Tri-State															
#3	GND															
#4	Output															
#5	N.C.															
#6	VDD															

■ Part Number Guide 产品编号

KV **70** **T** - **27.000** - **100** - **33** - **C** - **30** - **NS**
 ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓

系列	封装	输出波形	标称频率 (In MHz)	压控范围	工作电压	工作温度	温度频差	特殊要求
KV=VCXO 压控振荡器	封装尺寸 70=7050 50=5032 32=3225	“ ”=低频 CMOS T=高频 CMOS D=LVDS		100=±100ppm 150=±150ppm 200=±200ppm	25=2.5V 33=3.3V	B: -20~+70°C C: -40~+85°C D: -55~+85°C E: -55~+105°C F: -55~+125°C	10 = ±10ppm 20 = ±20ppm 30 = ±30ppm 50 = ±50ppm 100 = ±100ppm	‘NS’:特 殊要求

■ Reflow Profile 回流焊

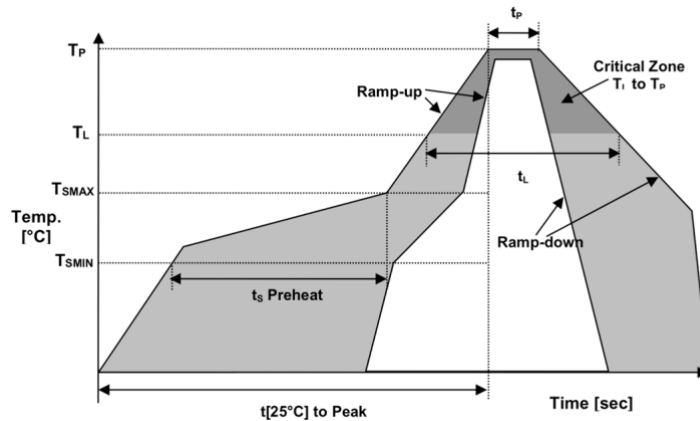

Temperature Min Preheat	最低预热温度	T_{Smin}	150°C
Temperature Max preheat	最高预热温度	T_{Smax}	200°C
Time (T_{Smin} to T_{Smax})	时间差	T_s	60~120 sec
Temperature	温度	T_L	217°C
Peak Temperature	最高温	T_p	260 °C
Ramp-up Rate	升温速度	R_{up}	3°C/sec max
Ramp-down Rate	降温速度	R_{down}	6°C/sec max
Time within 5°C of Peak Temperature	最高温度停留时间	t_p	30 sec
Time t[25°C] to peak temperature	25度到最高温度时间	t[25°C] to peak	480 sec
Time	时间	t_L	60~150 sec

■ Revision 版本

版本 Rev.	修改页 Revise Page	修改内容 Revise Contents	日期 Date	修改人 Reviser
1.0	NA	-	2021.12.25	JH