

晶体谐振器 Crystal Resonator: KX49M6

Feature 特征

- Low aging rate for long-term frequency stability 老化率低
- AT or BT cut crystal for superior thermal characteristics AT 或 BT 切割晶体
- Excellent vibration and shock resistance 抗振动和抗冲击能力强
- High stability and reliability for industrial applications 高稳定性与高可靠性



General Specifications 规格参考

PARAMETER	性能参数	KX49M6
Frequency Range	频率范围	3.5MHz ~ 70MHz
Oscillation Mode	振荡方式	基频/泛音
Frequency Tolerance (25°C±3°C)	调整频差	±5ppm ~ ±30ppm
Load Capacitance	负载电容	Series or Parallel (8~32pF)
Frequency Stability	温度频差	见下表
Operating Temperature Range	温度范围	见下表
Equivalent Series Resistance	谐振电阻	20Ω ~ 200Ω
Drive Level	激励电平	100μW typical, 300μW max
Shunt Capacitance	静电容	7pF max
Insulation Resistance	绝缘电阻	500MΩ min
Storage Temperature Range	储存温度范围	-55°C to +125°C
Aging Per Year	年老化率	±3ppm/year ~ ±5ppm/year

Frequency Stability 温度频差 VS Operating Temperature Range 温度范围


Temp. Code	Temp.\ppm	±10	±20	±30	±50	±100
B	-20~70°C	○	○	○	○	○
C	-40~85°C		○	○	○	○
D	-55~85°C			○	○	○
E	-55~105°C				○	○
F	-55~125°C				○	○

NOTE: Please consult for other specifications 若有其它规格需求请告知


Part Number Guide 产品编号

<u>KX49M6</u>	-	<u>12.000</u>	-	<u>F</u>	-	<u>20</u>	-	<u>C</u>	-	<u>30</u>	-	<u>30</u>	-	<u>NS</u>
↓		↓		↓		↓		↓		↓		↓		↓
型号	-	标称频率	-	振荡方式	-	负载	-	工作温度	-	调整频差	-	温度频差	-	特殊要求
‘KX’: 产品系列								B: -20~+70℃		05 = ±5ppm		10 = ±10ppm		
‘49M’: 封装尺寸								C: -40~+85℃		10 = ±10ppm		20 = ±20ppm		
‘6’: 引脚数								D: -55~+85℃		15 = ±15ppm		30 = ±30ppm		
								E: -55~+105℃		20 = ±20ppm		50 = ±50ppm		
								F: -55~+125℃		30 = ±30ppm		100 = ±100ppm		

■ Outline Dimensions (Unit: mm) 外形尺寸

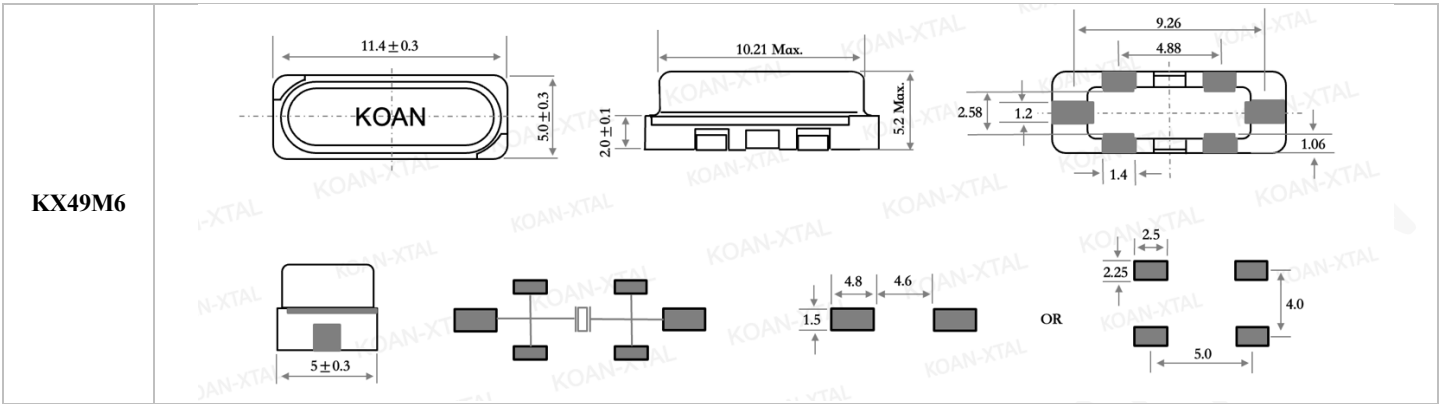

■ Reflow Profile 回流焊

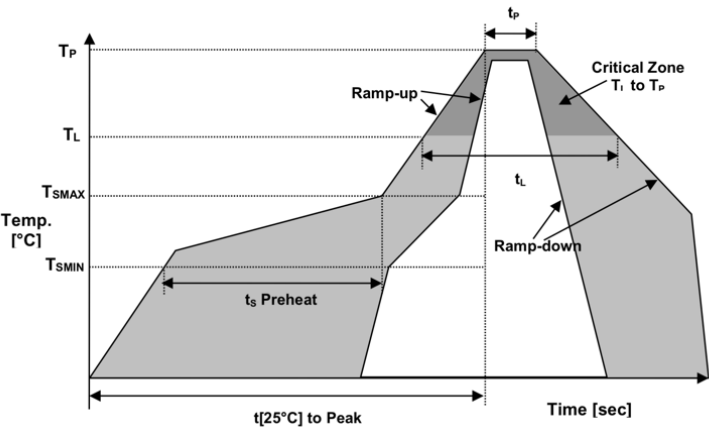

Temperature Min Preheat	最低预热温度	T_{smin}	150°C
Temperature Max preheat	最高预热温度	T_{smax}	200°C
Time (T_{smin} to T_{smax})	时间差	T_s	60~120 sec
Temperature	温度	T_L	217°C
Peak Temperature	最高温	T_p	260 °C
Ramp-up Rate	升温速度	R_{up}	3°C/sec max
Ramp-down Rate	降温速度	R_{down}	6°C/sec max
Time within 5°C of Peak Temperature	最高温度停留时间	t_p	30 sec
Time $t[25^{\circ}\text{C}]$ to peak temperature	25度到最高温度时间	$t[25^{\circ}\text{C}]$ to peak	480 sec
Time	时间	t_L	60~150 sec

■ Revision 版本

版本 Rev.	修改页 Revise Page	修改内容 Revise Contents	日期 Date	修改人 Reviser
0	N/A	Initial issue	2025.06.23	JZ