

温补振荡器 Temperature Compensated Crystal Oscillator: K(V)T16CS

Feature 特征

- Ultra-miniature 1.6x1.2mm package; Clipped Sine wave output for low EMI 超小型 1610 封装削峰正弦波输出
- Wide frequency range and tight frequency stability $\pm 1\text{ppm}$ over -40°C to $+85^{\circ}\text{C}$ 频率范围宽, 频率稳定性高
- VCTCXO option allows frequency tuning via control voltage 支持通过控制电压进行频率微调
- Ideal for GPS, communication, industrial, and measurement systems 适用于 GPS, 通信设备, 工业控制和测量系统等




General Specifications 规格参考

| PARAMETER | 性能参数 | K(V)T16CS | | | | | |
|-------------------------------|-------------------|---|-------|------|-------|--------|--|
| Supply Voltage | 工作电压 | +1.8V; +2.5V | | | | | |
| Frequency Range | 频率范围 | 13.0~52.0MHz | | | | | |
| Standard Frequency | 通用频率 | 16.368, 16.369, 19.2, 26, 33.6, 38.4, 52MHz | | | | | |
| Output Waveform | 输出波形 | Clipped Sine Wave | | | | | |
| Output Load | 输出负载 | 10K Ω //10pF | | | | | |
| Output Logic | 输出电平 | 0.8Vp-p min. | | | | | |
| Initial Calibration Tolerance | 调整频差 | $\pm 2.0\text{ppm}$ max (After 2 times reflows) | | | | | |
| Current Consumption | 工作电流 | 40mA max. | | | | | |
| Frequency Stability 频率稳定性 VS | | | | | | | |
| Operating Temperature Range | 温度范围 | 见下表 | | | | | |
| Frequency Stability | 温度频差 | | | | | | |
| Load Change | 负载变化 | $\pm 0.2\text{ppm}$ (Load $\pm 5\%$) | | | | | |
| Voltage Change | 电压变化 | $\pm 0.2\text{ppm}$ (Vcc $\pm 5\%$) | | | | | |
| Aging | 老化率 | $\pm 1.0\text{ppm/year}$ max | | | | | |
| Reflow | 回流焊 | $\pm 1.0\text{ppm}$ max | | | | | |
| Control Voltage Range | 控制电压范围 | 0.9 \pm 0.6V@1.8Vdd; 1.4 \pm 1.0V @2.5Vdd | | | | | |
| Frequency Tuning Range | 频率调节范围 | $\pm 8\text{ppm}$ min. | | | | | |
| Phase Noise @10MHz | 相位噪声 Max (dBc/Hz) | -75 | -110 | -125 | -145 | -150 | |
| | | 10Hz | 100Hz | 1kHz | 10kHz | 100kHz | |
| Input Impedance | 输入电阻 | 100K Ω min. | | | | | |
| Start-up Time | 起振时间 | 5ms max. | | | | | |
| Storage Temperature Range | 储存温度范围 | $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$ | | | | | |

| Frequency Stability 温度频差 VS Operating Temperature Range 温度范围 | | | | | | | |
|--|------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Temp. Code | Temp.\ppm | ± 0.5 | ± 1.0 | ± 2.0 | ± 2.5 | ± 3.0 | ± 5.0 |
| A | $-10\sim 60^{\circ}\text{C}$ | ○ | ○ | ○ | ○ | ○ | ○ |
| B | $-20\sim 70^{\circ}\text{C}$ | ○ | ○ | ○ | ○ | ○ | ○ |
| C | $-40\sim 85^{\circ}\text{C}$ | | ○ | ○ | ○ | ○ | ○ |

NOTE: Please consult for other specifications 若有其它规格需求请告知


■ Outline Dimensions (Unit: mm) 外形尺寸

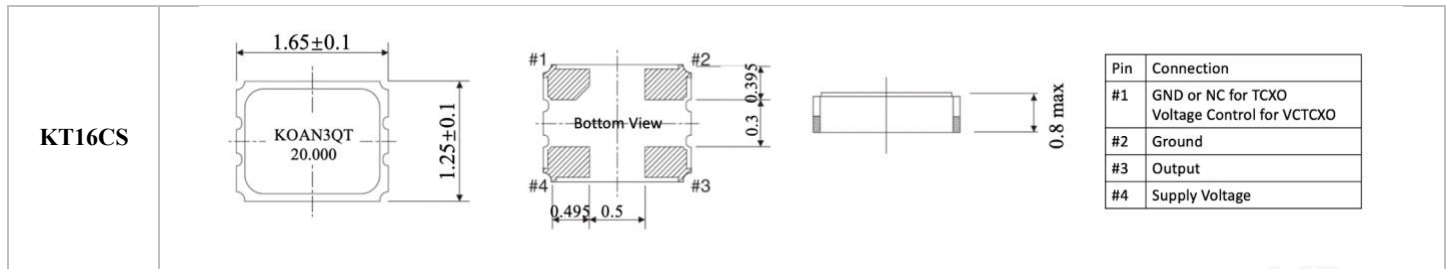

■ Part Number Guide 产品编号

| <u>K(V)T16CS</u> | - | <u>20.000</u> | - | <u>33</u> | - | <u>C</u> | - | <u>01</u> | - | <u>NS</u> |
|---|---|---------------|---|--------------------|---|--|---|---|---|-----------|
| ↓ | | ↓ | | ↓ | | ↓ | | ↓ | | ↓ |
| 型号 | - | 标称频率 | - | 工作电压 | - | 工作温度 | - | 温度频差 | - | 特殊要求 |
| ‘KT’:温补系列 KT: TCXO KVT: VCTCXO ‘16’: 封装尺寸 1.6x1.2mm ‘CS’: 输出波形 Clipped Sine | | (In MHz) | | 18=1.8V 25=2.5V | | A: -10~+60°C B: -20~+70°C C: -40~+85°C | | A5 = ±0.5ppm 01 = ±1.0ppm 02 = ±2.0ppm 025 = ±2.5ppm 03 = ±3.0ppm 05 = ±5.0ppm | | ‘NS’:特殊要求 |

■ Reflow Profile 回流焊

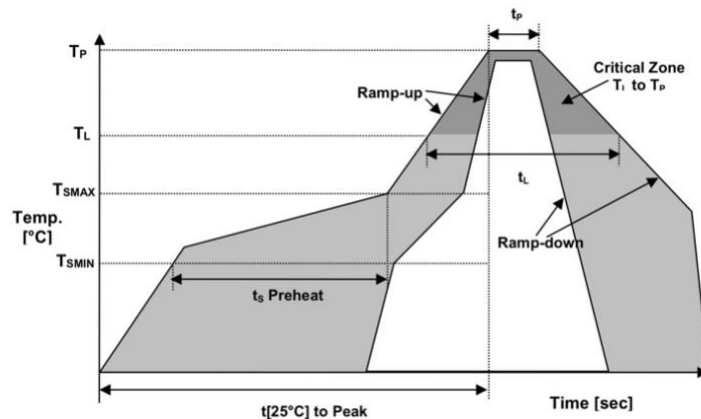

| | | | |
|-------------------------------------|------------|-------------------|-------------|
| Temperature Min Preheat | 最低预热温度 | T_{smin} | 150°C |
| Temperature Max preheat | 最高预热温度 | T_{smax} | 200°C |
| Time (T_{smin} to T_{smax}) | 时间差 | T_s | 60~120 sec |
| Temperature | 温度 | T_L | 217°C |
| Peak Temperature | 最高温 | T_p | 260 °C |
| Ramp-up Rate | 升温速度 | R_{up} | 3°C/sec max |
| Ramp-down Rate | 降温速度 | R_{down} | 6°C/sec max |
| Time within 5°C of Peak Temperature | 最高温度停留时间 | t_p | 30 sec |
| Time $t[25°C]$ to peak temperature | 25度到最高温度时间 | $t[25°C]$ to peak | 480 sec |
| Time | 时间 | t_L | 60~150 sec |